

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in useability
- Ideal for surface mount stairwell lighting
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages



SPECIFICATIONS

CONSTRUCTION

Pre painted white steel utilizing screw fasteners for gear tray connection
White acrylic end caps

MOUNTING & INSTALLATION

Surface mount only
Connection brackets upon request to be used for end to end applications
Installation kits available for various wall styles

OPTICAL

Evenly diffuse extruded acrylic lens
Wide distribution due to wrap around curved lens

ELECTRICAL

LED Light Engine designed for reliability and long life operation
Standard 0-10V dimming to 1%
120 - 277 V standard; 347V or 480V available


CONTROLS

Individual or grouping control with many solutions available
Consult factory for specific requirements

LISTINGS

DesignLights Consortium qualified, see DLC QPL
ETL safety certified for damp locations
Standard 5 year warranty

DIMENSIONAL INFORMATION

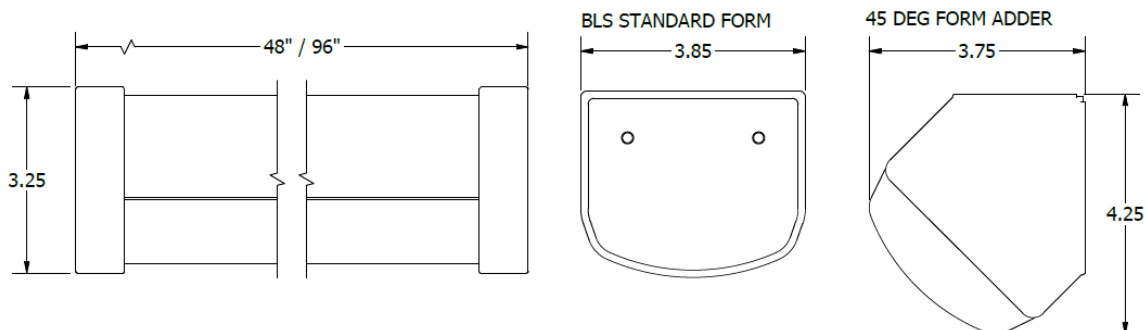

ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE	COLOR TEMP	FR-BLS	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	12CE 1' x 2'	1' X 2' F2X2H 13W 1863 LUMENS	35 3500K 40 4000K 50 5000K 2765* 2700K - 6500K (ADJUSTABLE)		FR FROSTED LENS (STANDARD OPTION) BLS BI LEVEL SENSOR FOR STAIRWELLS 45 CE 45 DEGREE BODY	SD STEP DIMMING (BI LEVEL OR TRI LEVEL) LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING D PREWIRED FOR 0-10V DIMMING EM EMERGENCY BACKUP INCLUDED (6W STANDARD) SNS200 SIGNIFY SNS200 OCCUPANCY SENSOR RGBW COLOR CHANGING WITH VARIOUS CONTROL OPTIONS AVAILABLE
				CUSTOM OPTIONS		

* 2765 is only for color select options using a compatible control system

ADDITIONAL GRAPHICS

