

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

- Superior light quality with maximum photometric efficiency
- Diverse controls compatibilities provide ease of mind in usability
- Robust construction by use of pre painted steel sheet metal
- Offered as a new fixture or a retrofit kit
- Wide variety of lumen packages available
- Multiple suspension options and configurations available



## SPECIFICATIONS

### CONSTRUCTION

- Pre painted white steel utilizing screw fasteners
- Pre painted aluminum LED gear pan for efficient heat dissipation

### MOUNTING & INSTALLATION

- Multiple hanging options including aircraft cable and pendant
- Back mounted access plate for quick electrical connections

### OPTICAL

- 92% diffuse white enamel reflector
- Evenly diffuse extruded acrylic lens

### ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1% with other standards available
- 120 / 277 compatible with other voltages available



### CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

### LISTINGS

- ETL safety certified for damp locations
- Standard 5 year warranty / 10 year warranty available upon request

## DIMENSIONAL INFORMATION

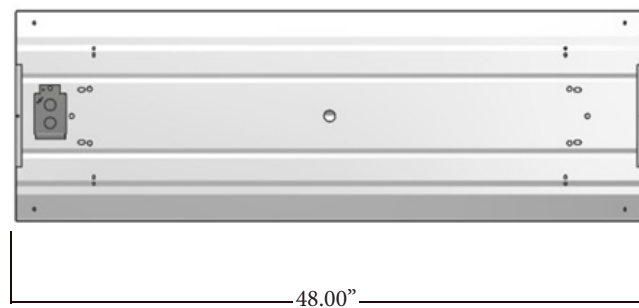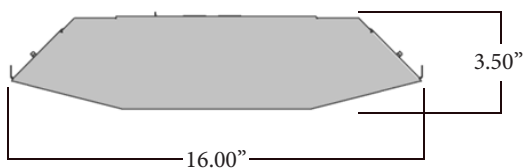

**ORDERING INFORMATION**

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
<b>F</b> FIXTURE	<b>14EC</b> 1' x 4'	<b>1' X 4'</b>		<b>35</b> 3500K	<b>FR</b> FROSTED LENS	<b>SD</b> STEP DIMMING (BI LEVEL OR TRI LEVEL)
<b>K</b> KIT		<b>F2M7</b> 70W (3 STRIP) 9641 / 10697 LUMENS	<b>F21X2</b> 115W (5 STRIP) 15871 / 17609 LUMENS	<b>40</b> 4000K		<b>LVD120 / 277</b> 120V / 277V LINE VOLTAGE DIMMING
		<b>F2Z8</b> 88W (3 STRIP) 11826 / 13122 LUMENS	<b>F21H0</b> 150W (5 STRIP) 20159 / 22366 LUMENS	<b>50</b> 5000K		<b>D</b> PREWIRED FOR 0-10V DIMMING
		<b>F21I5</b> 106W (3 STRIP) 13898 / 15420 LUMENS	<b>F21Y5</b> 176W (5 STRIP) 23163 / 25700 LUMENS			<b>EM</b> EMERGENCY BACKUP INCLUDED (6W STANDARD)
		<b>F21X3</b> 114W (3 STRIP) 14820 / 16443 LUMENS	<b>F21Z0</b> 190W (5 STRIP) 24700 / 27405 LUMENS			<b>OCC</b> VARIOUS OCCUPANCY SENSORS AVAILABLE FOR VARIOUS CONTROL TYPES
		<b>F2C0</b> 92W (4 STRIP) 12697 / 14088 LUMENS	<b>F21N5</b> 138W (6 STRIP) 19046 / 21131 LUMENS			<b>AVI</b> AVI-ON WIRELESS CONTROLS VARIOUS OPTIONS, PLEASE SPECIFY COMPONENT CHOICES
		<b>F21L0</b> 120W (4 STRIP) 16127 / 17893 LUMENS	<b>F21Z1</b> 180W (6 STRIP) 24190 / 26840 LUMENS			
		<b>F21M2</b> 142W (4 STRIP) 18693 / 20740 LUMENS	<b>F22X1</b> 211W (6 STRIP) 27796 / 30840 LUMENS			
		<b>F21H1</b> 152W (4 STRIP) 19760 / 21924 LUMENS	<b>F22L2</b> 228W (6 STRIP) 29612 / 32855 LUMENS			

\* Lumens options are shown as X / Y LUMENS "X = Frosted Lens Present, Y = No Lens"

**ADDITIONAL GRAPHICS**

