

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

- Ultra bright, energy efficient, long life Red or Green LEDs
- Aesthetically pleasing, curved face, rounded corner design
- Certified to CEC under Title 20 Regulations
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- EZ snap-out Chevron directional indicators



## SPECIFICATIONS


### BATTERY

Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 1.2V Long life, maintenance-free, rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### CONSTRUCTION

Injection-molded, engineering grade, 5VA flame retardant, highimpact resistant, thermoplastic in white or black finish.

## DIMENSIONAL INFORMATION

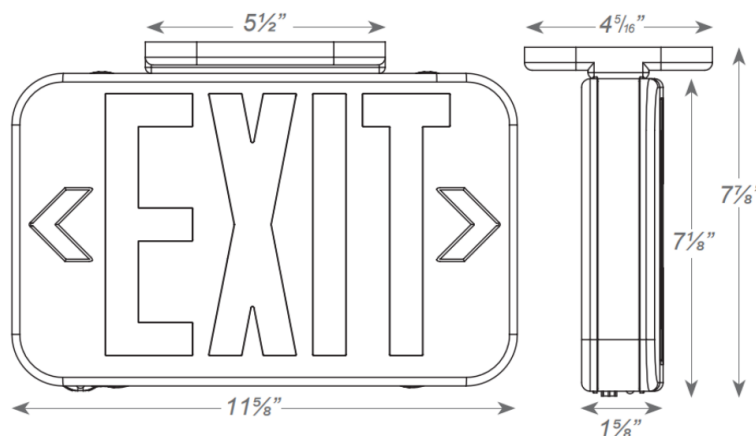

**ORDERING INFORMATION**

STYLE	# OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
EZR <sup>X</sup> TEU FIXTURE	2 UNIVERSAL SINGLE / DOUBLE FACE	R RED  G GREEN	W WHITE  B B	BLANK AC ONLY  EM BATTERY BACKUP

**ADDITIONAL GRAPHICS**

