

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in usability
- Ideal for suspended or surface mount general lighting needs, varied options available for mounting
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- 80 CRI standard and 90 CRI options available
- Color Tuning and RGBW available with correlating controls packages



SPECIFICATIONS

CONSTRUCTION

Pre painted white steel utilizing screw fasteners for gear tray connection
White acrylic end caps

MOUNTING & INSTALLATION

Suspended or surface mount
Connection brackets upon request to be used for end to end applications
Installation kits available for various ceiling styles

OPTICAL

Evenly diffuse flat acrylic lens
End to end illumination for even row lighting

ELECTRICAL

LED Light Engine designed for reliability and long life operation
Standard 0-10V dimming to 1%
120 - 277 V standard


CONTROLS

Individual or grouping control with many solutions available
Consult factory for specific requirements

LISTINGS

DesignLights Consortium qualified, see DLC QPL
ETL safety certified for damp locations
Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

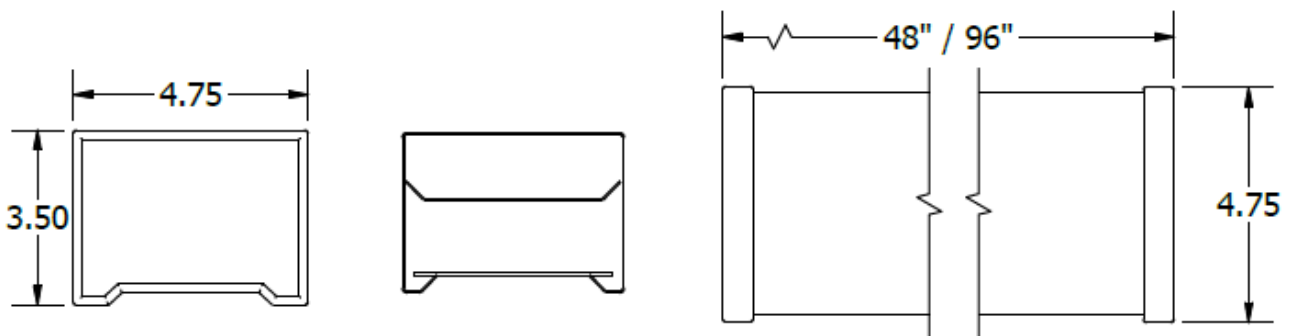

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED

ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060



ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE			COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	14GN 1' x 4'	1' X 4'	1' X 6'	1' X 8'	35 3500K	FR FROSTED LENS (STANDARD OPTION) SAL STANDALONE FIXTURE CONTINUOUS ROW OPTIONS: STR START OF ROW FIXTURE MID MIDDLE OF ROW FIXTURE END END OF ROW FIXTURE	SD STEP DIMMING (BI LEVEL OR TRI LEVEL) LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING D PREWIRED FOR 0-10V DIMMING EM EMERGENCY BACKUP INCLUDED (6W STANDARD) UL UPLIGHT (SUSPENDED MOUNTING ONLY) RGBW* COLOR CHANGING AVAILABLE WITH VARIOUS CONTROL OPTIONS BABA BABA COMPLIANT
	16GN 1' x 6'	F4X2 12W 1661 LUMENS	F4X8 18W 2492 LUMENS	F4L4 24W 3322 LUMENS	40 4000K		
	18GN 1' x 8'	F4X8 18W 2412 LUMENS	F4L7 27W 3617 LUMENS	F4N6 36W 4823 LUMENS	50 5000K		
	1' x 2' OPTIONS AVAILABLE	F4L4 24W 3155 LUMENS	F4N6 36W 4733 LUMENS	F4M8 48W 6311 LUMENS	3550* 3500K - 5000K (SELECTABLE)		
		F4L8 28W 3629 LUMENS	F4M2 42W 5443 LUMENS	F4H6 56W 7257 LUMENS	2765* 2700K - 6500K (ADJUSTABLE)		
		F4N2 32W 4093 LUMENS	F4M8 48W 6139 LUMENS	F4V4 64W 8185 LUMENS			
		F4N5 35W 4439 LUMENS	F4H2 53W 6658 LUMENS	F4Y0 70W 8878 LUMENS			
		F4M0 40W 4987 LUMENS	F4V0 60W 7481 LUMENS	F4Z0 80W 9974 LUMENS			
		F4M4 43W 5275 LUMENS	F4V6 64W 7913 LUMENS	F4Z8 86W 10550 LUMENS			

* 3550 adder for field-selectable via onboard switches
 * 2765 and RGBW adders are options only available using a compatible control system

ADDITIONAL GRAPHICS



Uplight option shown

